


# VX3042

---

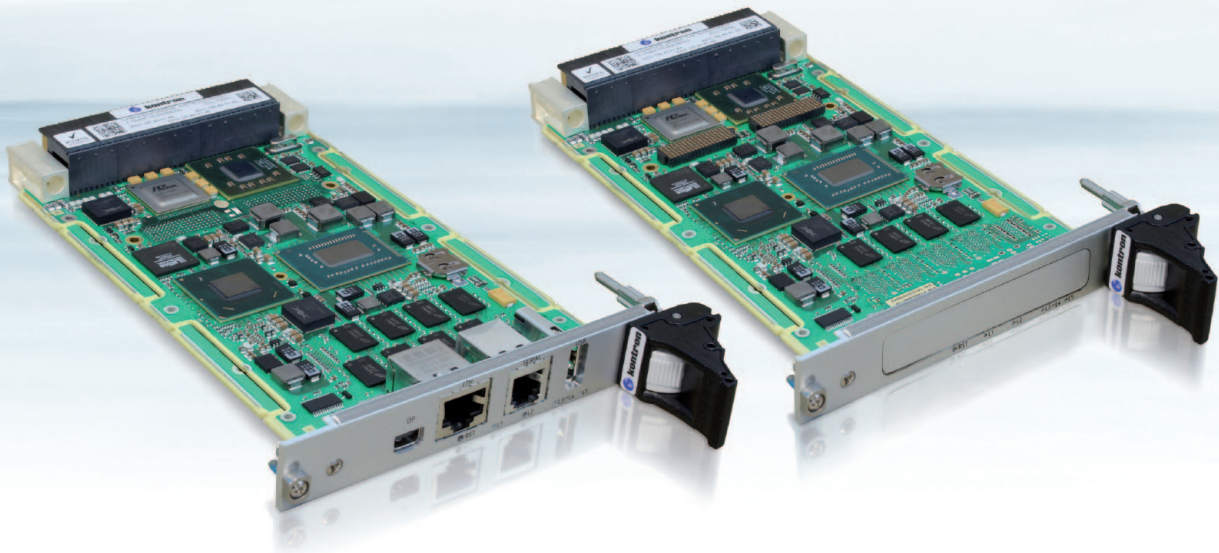

## 3U VPX 3<sup>RD</sup> GENERATION INTEL® CORE™ I7 SINGLE BOARD COMPUTER

- ▶ Intel® Core™ i7 - 3517UE - Dual-Core™ user Configurable TDP
- ▶ Dual Ethernet 10G or 1G
- ▶ PCI Express Gen 3.0, with Kontron VXFabric™
- ▶ XMC with front and rear I/O Support
- ▶ Up to 16 GB SDRAM with ECC and 32 GB Soldered SATA NAND Flash

POSSIBILITIES START HERE



## PRODUCT OVERVIEW

VX3042 is the Kontron 3U VPX rugged Single Board Computer equipped with multiple Ethernet 10G. This SBC implements a new architecture poised to address specific applications and offer the ultimate performance for the Military, Aerospace and Transportation markets.

Based on Intel®'s high performance computing architecture, and supported by Kontron Long Term Supply (LTS) services, VX3042 offers the best feature set.

### TARGET APPLICATIONS

#### Console and Rugged Servers

In today's network-centric battlefield, console and high-end servers applications require rugged computers to operate in the most difficult environments. Kontron VX3042 is designed around a high-end Dual Core CPU. This SBC features a configurable TDP, enabling to adjust the board performance to the exact mission profile required. Providing up to 16 GB DDR3-SDRAM, multiple Ethernet 10G and an XMC support, the VX3042 offers numerous configuration variants.

### STANDARDS

- ▶ 3U VPX VITA 46, OpenVPX VITA 65, VPX REDI VITA 48
- ▶ Single CPU: compatible with all existing legacy application x86 codes

### SWAP-C

- ▶ Four Execution Threads: compact 4-way SMP solution for parallel computing tasks at low power, low size
- ▶ Configurable TDP available on VX3042 board
- ▶ Turbo Boost: overclocked operation of a single-threaded workload in the same power envelope
- ▶ Integrated Graphics Controller with three simultaneous DisplayPorts: for all HMI applications

### SAFETY CRITICAL

- ▶ Two channels of DDR3 soldered memory with ECC: performance and security
- ▶ 1 Mb of permanent Ferroelectric Random Access Memory (F-RAM) allowing permanent retention of application key operational data
- ▶ 8 MB of System Flash with Recovery BIOS Image and permanent storage of BIOS parameters

### CONNECTIVITY

- ▶ 8 lanes of gen3 PCIe to the backplane: I/O extensions at peak bandwidth. Designed for PCIe Gen3 8GB/s
- ▶ 4 SATA ports to the backplane: for secure RAID storage applications
- ▶ One XMC site with x8 PCIe interface

### VERSATILITY

- ▶ VX3042 is available in Standard Air- (SA) and Rugged Conduction-cooled (RC) versions and is compatible with 0.8"(4HP) and 1"(5HP) slot pitch
- ▶ VX3042 with Intel Core i7 3517UE, offers a User Configurable TDP (Thermal Design Point) allowing the user to set up the processor's power and frequency: 25W/2.2 GHz, 17W/1.7 GHz and 14W/0.8 GHz

### COMPATIBILITY: CERTIFIED SOLUTION

VX3042 is compatible with all Kontron VPX building blocks (Payload boards, carriers, switches, backplanes, OS and drivers) and offer backward compatibility with the previous product generations (VX303x SBCs).

Write the code once, run on all the product line. VX3044 is proposed with Kontron VXFabric™ technology which implements TCP/IP protocol over the PCI Express infrastructure.

With 8x PCIe 3.0, running at 8 GB/s (theoretical), applications developed previously with VXFabric on VX3030 or VX3035 will enjoy a TCP/IP on PCIe bandwidth exceeding 4 GB/s (measured) without any code change.

### LONG TERM SUPPLY (LTS)

The VX3042 SBC is part of the Kontron Extended Life Cycle product family, which offers a 15-year life cycle organization on top of Intel® embedded product line silicon life cycle. Available in Kontron 3U VPX development systems, along with 3U VPX carriers and 3U VPX Ethernet plus PCIe switches, the VX3042 is the ideal candidate for long term programs in search of general purpose solutions.

## EXAMPLE OF TARGET APPLICATIONS



► TECHNICAL INFORMATION

<b>PROCESSOR</b>		<p>Third Generation Intel® Core™ i7 processor (22-nanometer silicon technology):</p> <ul style="list-style-type: none"> <li>▶ Intel® Core™ i7-3517UE Processor (4M cache, 2 execution cores, 4 threads)</li> <li>▶ Dual Core, user configurable TDP 25W/2.2 GHz, 17W/1.7 GHz, 14W/0.8 GHz</li> <li>▶ Integrated Graphics Core, Intel® HD graphics 4000</li> </ul>
<b>ONBOARD CONTROLLER</b>	<p>Platform Controller Hub</p> <p>Graphics</p> <p>Gigabit Ethernet</p> <p>Watchdog</p> <p>System CPLD</p> <p>RTC</p> <p>SIO</p>	<p>Mobile Intel® QM77 Express Chipset:</p> <ul style="list-style-type: none"> <li>▶ Up to 6 Gb/s integrated Serial ATA host controllers</li> <li>▶ USB 2.0 &amp; 3.0 host interface</li> </ul> <p>Integrated Graphics Core, Intel® HD graphics 4000</p> <p>Up to 3 simultaneous graphics heads:</p> <ul style="list-style-type: none"> <li>▶ One mini DisplayPort on front panel</li> <li>▶ Two DisplayPorts available on VPX backplane.</li> </ul> <ul style="list-style-type: none"> <li>▶ One i82599 10/1 Gigabit Controller connecting two SerDes links (10GBASE-KR or 1000BASE-BX) on VPX backplane</li> <li>▶ 10GBASE-KR links can be used for backplane board interconnect and/or for SFP+rear cage according SFI specification (redriver recommended)</li> <li>▶ One i82579 PHY connected on front panel or VPX backplane (user selection) for 1000BASE-T operation</li> </ul> <p>PLD-based, timeout ranging from 2 µs to 510s, IRQ, Reset, dual-stage</p> <p>One CPLD Board controller for power sequencing, reset handling, monitoring, failure detection, VPX I2C communication.</p> <p>Provides configuration/status registers on LPC interface</p> <p>Separated low power RTC with optional onboard battery</p> <p>SIO1028 provides two serial lines</p>
<b>MEMORY</b>	<p>System Memory</p> <p>Flash (uEFI BIOS)</p> <p>EEPROM</p> <p>NAND Flash Option</p>	<p>Up to 16 GB dual channel DDR3 SDRAM running at 1333 MHz, with ECC, soldered</p> <p>8 MB FLASH, with recovery image and uEFI BIOS settings</p> <p>One serial 256 Kbit EEPROM dedicated to system data</p> <p>One serial 256 Kbit EEPROM dedicated to application data</p> <p>Up to 32 GB SATA Nand Flash storage</p>
<b>FRONT INTERFACES 4HP (0,8") OR 5HP (1")</b>	<p>Graphics</p> <p>USB</p> <p>Gigabit Ethernet</p> <p>Serial</p> <p>LEDs</p> <p>Reset</p>	<p>1x mini DisplayPort connector</p> <p>1x USB 2.0 ports, 4-pin standard USB connectors</p> <p>1x RJ-45 connectors: Ethernet 1000BASE-T</p> <p><b>Note:</b> This port is configurable from the BIOS to be routed to the VPX P1 connector instead of the front connector</p> <p>1x RJ-12 connector: EIA-232/EIA-485 UART interface for CPU</p> <p>5 LEDs reporting the board CPU health status and activity</p> <p>Reset push button</p>
<b>ONBOARD INTERFACES</b>	<p>CPU Debug Interface</p> <p>XMC Slot</p>	<p>XDP port for CPU extended debug port connection (only available on a debug connector and need additional test board for XDP access)</p> <p>One 8x PCIe to the XMC slot, x8d VITA 46.9 XMC I/O routing, plus 4 single ended pins</p>
<b>VPX INTERFACE</b>	<p>Slot Profiles</p> <p>Rear I/O via P0/P1/P2</p> <p>Supervisory Functions</p> <p>Power Supplies</p>	<p>SLT3-PAY-2F2U-14.2.3</p> <p>SLT3-PAY-1F1F2U-14.2.4</p> <p>SLT3-PAY-1F1U-14.2.10</p> <p>The VX3042 supports:</p> <ul style="list-style-type: none"> <li>▶ 1 x8 gen3 PCIe, non transparent capability, on P1</li> <li>▶ 1x1 additional PCIe interface, gen2, on P2</li> <li>▶ 2 SATA 3 links on P1</li> <li>▶ 2 additional SATA 2 links on P2</li> <li>▶ 2 USB 2.0 and 1 USB 3.0 links on P1</li> <li>▶ 2 additional USB 2.0 links on P2</li> <li>▶ 2 SerDes 10GBASE-KR, SFP+ /SFI or 1000BASE-BX on P1</li> <li>▶ 1 1000BASE-T on P1, optional 2nd 1000BASE-T on P2</li> <li>▶ 3 User GPIOs on P1, including OpenVPX GDISCRETE1, and MASKABLE RESET and 3 additional GPIOs on P0</li> <li>▶ 2 DisplayPort on P2</li> <li>▶ Non Maskable RESET,</li> <li>▶ NVMRO, SMB 0 and SMB 1 interfaces for Status, Start , Reset. Compatible with Kontron CMB (Monitoring Board), temperature and voltage sensors on the board</li> <li>▶ PCIe optional use of common reference clock feature</li> </ul> <p>On P0: VS1=12V, VS3=5V, 3.3V_AUX optional, +12V_AUX and VS2 (3.3V) not connected</p>

## MEASURED PERFORMANCE

### MEASURED BANDWIDTH VX3042 & VX3044


5.6 GBytes/sec	PCIe on VPX backplane (DMA raw mode)
3.9 GBytes/sec	TCP/IP on PCIe on VPX backplane (VXFabric™)
1.1 GBytes/sec	10 GETH link on VPX backplane (9.2 Gb/s)

### MEMORY BANDWIDTH - VX3042

Read	14.7 GBytes/sec
Write	13.8 GBytes/sec

### AVERAGE POWER CONSUMPTION

VX3042-SA	34W
Conditions	TDP Nom 17W/1.7 GHz, CPU load = 75%, CPU Temp = 70°C - Turbo Off

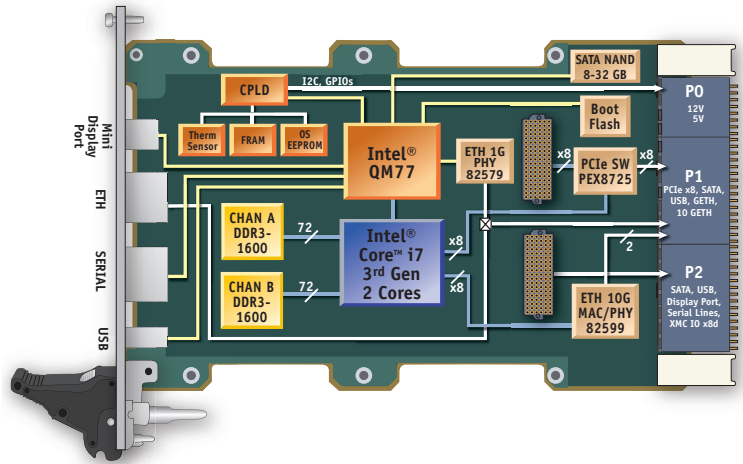

## ENVIRONMENTAL SPECIFICATION

	SA - STANDARD COMMERCIAL (1" single height passive module heat sink, forced air)	RA - RUGGED AIR-COOLED (Optional)	RC - RUGGED CONDUCTION-COOLED (Depending on processor frequency)
CONFORMAL COATING	Optional	Standard	Standard
AIRFLOW	26 cfm	TBD	NA
TEMPERATURE	VITA 47-Class AC1	VITA 47-Class AC3	VITA 47-Class CC3, CC4 option
COOLING METHOD	Convection	Convection	Conduction
OPERATING	0° to +55°C	-40° to +71°C	-40° to +71°C, +85°C option
STORAGE	-45° to +85°C	-45° to +100°C	-45° to +100°C
VIBRATION SINE (OPERATING)	20-500 Hz - 2g	5-2,000 Hz - 3g	20-2,000 Hz - 5g
RANDOM	VITA 47-Class V1	VITA 47-Class V2	VITA 47-Class V3
SHOCK (OPERATING)	20g/11 ms Half Sine	40g/11 ms Half Sine	40g/11 ms Half Sine
ALTITUDE (OPERATING)	-1,500 to 60,000 ft	-1,500 to 60,000ft	-1,500 to 60,000 ft
RELATIVE HUMIDITY	90% without condensation	95% without condensation	95% without condensation

## ORDERING INFORMATION

ARTICLE	ORDER CODE	DESCRIPTION
VX3042	VX3042-SA28-2000000	3U Single slot 4 HP (0.8") VPX SBC; Dual Core up to 2.2 GHz Intel® Core™ i7 -3517UE ULV Processor; 8 GB DDR3-SDRAM, 32 GB Sata Flash (MLC) on board, FRAM, I/O: 2x10 GbE, 3xUSB, 4xSATA; Air-Cooled VITA 47 Class AC1 (0°C to +55°C)
VX3042	VX3042-SA24-2010100	3U Single slot 5 HP (1") VPX SBC with onboard XMC slot/no Front Connectors; Dual Core up to 2.2 GHz Intel® Core™ i7-3517UE ULV Processor; 4 GB DDR3-SDRAM, 32 GB Sata Flash (MLC) on board, FRAM; I/O: 2x10 GbE, 3xUSB, 4xSATA; AirCooled VITA 47 Class AC1 (0°C to +55°C)
VX3042	VX3042-SA28-0000000	3U Single slot 4 HP (0.8") VPX SBC; Dual Core up to 2.2 GHz Intel® Core™ i7 -3517UE ULV Processor; 8 GB DDR3-SDRAM, FRAM; I/O: 2x10 GbE, 3xUSB, 4xSATA; Air-Cooled VITA 47 Class AC1 (0°C to +55°C)
VX3042	VX3042-RC24-100N100	3U Single slot VPX SBC with onboard XMC slot; Dual Core up to 2.2 GHz Intel® Core™ i7 -3517UE ULV Processor; 4 GB DDR3-SDRAM, 8 GB Sata Flash (SLC), FRAM; I/O: 2x10 GbE, 3xUSB, 4xSATA; 5 HP (1") if XMC installed, 4 HP (0.8") otherwise; Rugged Conduction-Cooled: VITA 47 Compliant Class CC3 (-40°C to +71°C), Class CC4 (-40°C to +85°C) available upon request, specific conditions may apply, please contact us.
VX3042	VX3042-RC28-300N000	3U Single slot 4 HP (0.8") VPX SBC; Dual Core up to 2.2 GHz Intel® Core™ i7 -3517UE ULV Processor; 8 GB DDR3-SDRAM, 16 GB Sata Flash (SLC), FRAM; I/O: 2x10 GbE, 3xUSB, 4xSATA; Rugged Conduction-Cooled: VITA 47 Compliant, Class CC3 (-40°C to +71°C), Class CC4 (-40°C to +85°C) available upon request, specific conditions may apply, please contact us.

## CORPORATE OFFICES

### EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5  
86156 Augsburg  
Germany  
Tel.: + 49 821 4086 0  
Fax: + 49 821 4086 111  
info@kontron.com

### NORTH AMERICA

14118 Stowe Drive  
Poway, CA 92064-7147  
USA  
Tel.: + 1 888 294 4558  
Fax: + 1 858 677 0898  
info@us.kontron.com

### ASIA PACIFIC

1-2F, 10 Building, No. 8 Liangshuihe 2nd Street,  
Economical & Technological Development Zone,  
Beijing, 100176, P.R.China  
Tel.: +86 10 63751188  
Fax: +86 10 83682438  
info@kontron.cn